

■ Real shot display



Transport Dimension			
Overall Operating Weight(Kg)	5500	Bucket Dumping Height(mm)	3200
Overall Length(mm)	6950	Backhoe Capacity (Width) (m ³)	0.28
Overall Width(mm)	2200	Max. Digging Depth(mm)	2500
Overall Height(mm)	3100	Tyre Model	16/70-20
Min. Ground Clearance (mm)	300	Pressure of Front wheel(Mpa)	0.22
Bucket Capacity(m ³)	1	Pressure of Back Wheel(Mpa)	0.22
Loading Lifting Capacity(Kg)	2000		

Brake System	
Service Brake	Air Over Oil Caliper Brak
	External Type
	Self-regulation
	Self-balance
Emergency Brake	Operation Power Implementing brake
	Manual Operation Power Terminating Brake

Engine			
Model	YUNNEI YN33GBZ Turbo	Rated Speed	2400r/min
Type	In Line, Direct injection, Four-Stroke, Water Cooling	Optional engine	XINCHAI EURO3 or 5/YANMAR EPA3/CUMMINS EPA4
Rated Power	65KW		

Standard configurations :

Front shovel with bucket, rear shovel with bucket, luxurious interior cab, heater, fan, luxury adjustable swivel seat, adjustable instrument panel, front shovel mechanical pilot operation, rear shovel hydraulic pilot operation, cab with Sliding window, cab can be flipped forward (for easy maintenance), Yunnei 65KW engine, 16/70-20 tires, 265 gearbox, dual pump, wheel bridge, A-shaped legs with locking, rear digging swing with buffer Function.

●The parameters or configuration are subject to change without notice.



BACKHOE LOADER

R920E



**EXCELLENT PERFORMANCE FULLY
MEET THE NEEDS OF VARIOUS USERS.**



EXCELLENT BASIC PERFORMANCE

CAB DISPLAY



The spacious and bright cab maintains a comfortable driving



Comfortable safety seat equipped with shock absorption function to provide a more comfortable use



The instrument panel is simple and clear, making it easier to observe the machine status and drive experience.



FRONT AND BACK WINGSPAN

Equipped with strong arms at the front and rear and drive experience.



RELIABLE WORKING PERFORMANCE



Bucket



Steering Wheel



A sturdy large arm



Comfortable cab



Tubing



PRODUCT HIGHLIGHTS

Product uses and features

It is widely used in earthwork construction machinery for highways, railways, construction, hydropower, ports, mines and other construction projects. It is mainly used for shoveling bulk materials such as soil, sand, gravel, lime, coal, etc. It can also be used for light shoveling operations on ore, hard soil, etc.


Show Details



Internal Display



The vehicle is equipped with heating and cooling air conditioning, a comfortable cab, and spacious seats to ensure the operator's experience. At the same time, the convenient operating system and solid and durable hardware configuration ensure that it can adapt to a variety of terrains and environments during use.

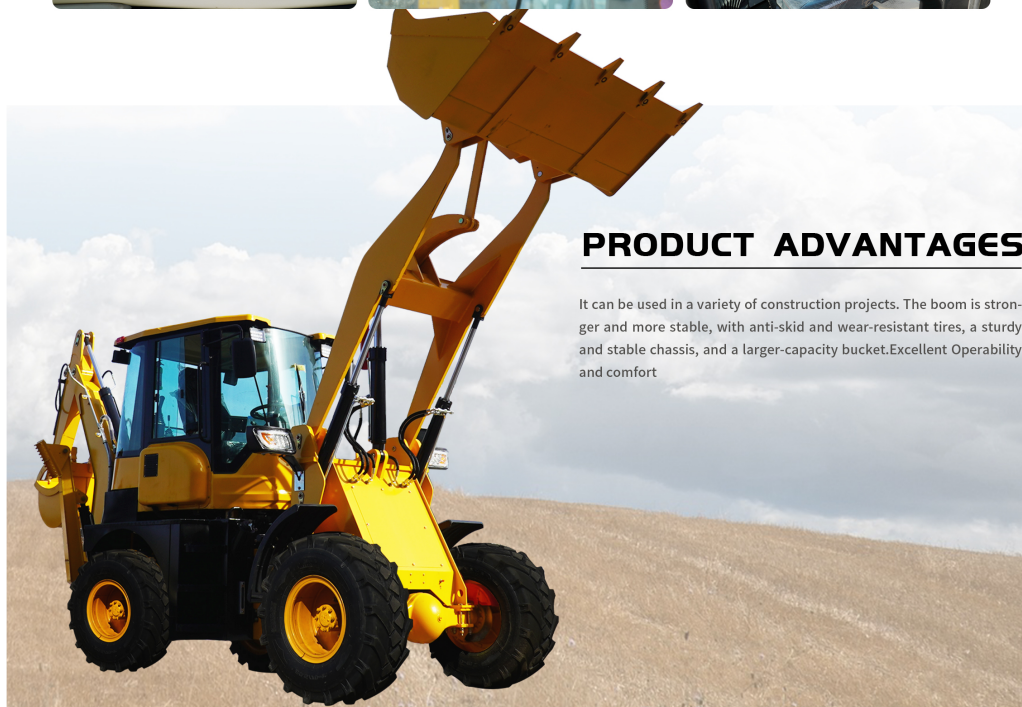

PRODUCT ADVANTAGES

It can be used in a variety of construction projects. The boom is stronger and more stable, with anti-skid and wear-resistant tires, a sturdy and stable chassis, and a larger-capacity bucket. Excellent Operability and comfort