■ Real shot display



Basic parameters					
Length x Width x Height(mm)	8000 x 2300 x 3250	Maximum Grade ability Capacity	30°		
Wheel Base(mm)	2250	Loading Bucket Capacity(cbm)	1.1		
Track(mm)	1640	Loading Capacity(Kg)	2800		
Min. Ground Clearance(mm)	300	Bucket Dump Height(mm)	3800		
Total Weight(Kg)	6800	Backhoe Bucket Capacity(cbm)	0.32		
Maximum Speed:(Km/h)	25K	Maximum Digging Depth(mm)	4100		

Diesel Engine					
Model	wuchai turbocharged engine	Optional engine	Cummins engine 4BTA3.9-100(75KW)		
Engine Power	85KW	Rated Speed	2,400RPM		
Туре	Inline, direct injection, four-stroke, liquid cooled				

Steering System					
Туре	Articulated hydraulic steering	Steering Angle	36°		
Steering Control Valve	BZZ5-250	Minimum Turning Radius	5018MM		
Turning Control Valve	YSF25S-00				

- Please read the instruction manual carefully and use it correctly.
- Be sure to fasten your seat belt during operation. **Except for soft top specification
- When driving construction machinery with a body weight of less than 3t, please receive "special education on driving construction machinery for vehicles" in advance, and be sure to participate in "skills training for driving construction machinery for vehicles" if it is more than 3t.

R308 According to the conditions of the Occupational Safety and Health Act, the body mass may reach 1200kg

• In order to prevent breakdowns and accidents, be sure to check the machine regularly.





EXCELLENT BASIC PERFORMANCE

CAB DISPLAY



The spacious and bright cab maintains a comfortable driving



Comfortable safety seat equipped with shock absorption function to provide a more comfortable use



The steering wheel and operation panel are fully functional and easy to understand, making it easy to operate






FRONT AND BACK WINGSPAN

Equipped with strong arms at the front and rear and drive.experience.experience.



RELIABLE WORKING PERFORMANCE

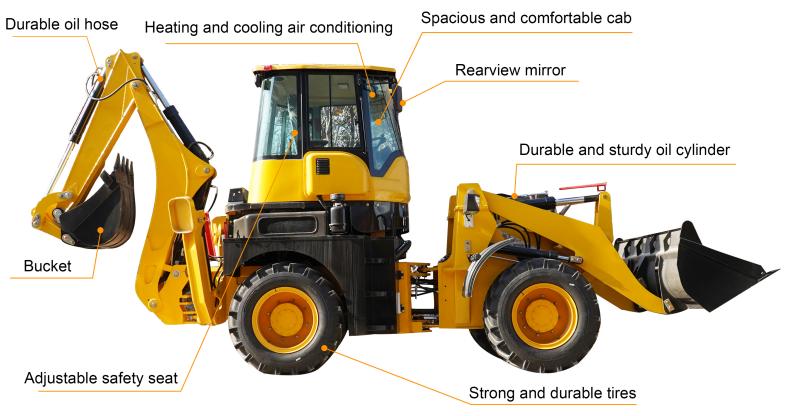



Bucket



Display instrument panel



A sturdy large arm



Comfortable cab



Tubing



PRODUCT HIGHLIGHTS

Product uses and features

It is widely used in earthwork construction machinery for highways, railways, construction, hydropower, ports, mines and other construction projects. It is mainly used for shoveling bulk materials such as soil, sand, gravel, lime, coal, etc. It can also be used for light shoveling operations on ore, hard soil, etc.

External Display









Show Details







The vehicle is equipped with heating and cooling air conditioning, a comfortable cab, and spacious seats to ensure the operator's experience. At the same time, the convenient operating system and solid and durable hardware configuration ensure that it can adapt to a variety of terrains and environments during use.





